


Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

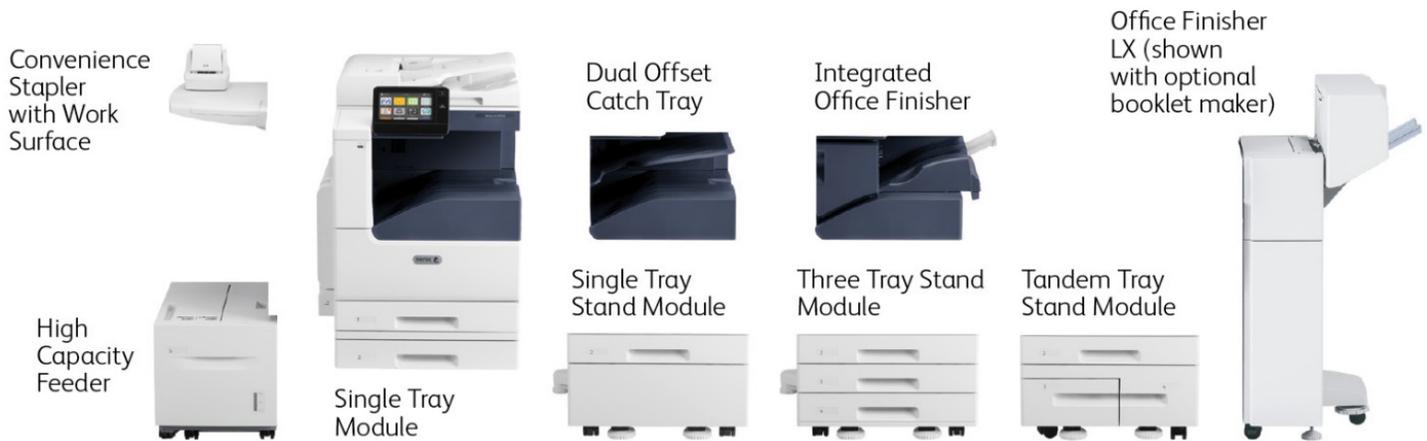

VersaLink B7000 Series Multifunction Printers are built on Xerox® ConnectKey Technology. For more information, go to www.ConnectKey.com.

| SYSTEM SPECIFICATIONS | VERSALINK B7025 | VERSALINK B7030 | VERSALINK B7035 |
|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------------------------------------------------|
| One-Sided Speed¹ 8.5 x 11 in. / A4 / 210 x 297 mm 8.5 x 14 in. / 216 x 356 mm 11 x 17 in. / A3 / 297 x 420 mm | Up to 25 ppm (pages per minute) long edge feed (LEF) Up to 16 ppm Up to 14 ppm | Up to 30 ppm LEF Up to 20 ppm Up to 17 ppm | Up to 35 ppm LEF Up to 22 ppm Up to 19 ppm |
| Two-Sided Speed¹ 8.5 x 11 in. / A4 / 210 x 297 mm 8.5 x 14 in. / 216 x 356 mm 11 x 17 in. / A3 / 297 x 420 mm | Up to 19 ppm LEF Up to 10 ppm Up to 9 ppm | Up to 23 ppm LEF Up to 12 ppm Up to 11 ppm | Up to 26 ppm LEF Up to 14 ppm Up to 13 ppm |
| Monthly Duty Cycle² | Up to 107,000 pages / month ¹ | Up to 129,000 pages / month ¹ | Up to 153,000 pages / month ¹ |
| Recommended Average Monthly Print Volume³ | Up to 13,000 pages | Up to 15,000 pages | Up to 17,000 pages |
| Hard Drive | 320 GB HDD (Optional on Desktop Model) | | |
| Processor | 1.05 GHz Dual-Core | | |
| Memory | 2 GB | | |
| Connectivity | Ethernet 10/100/1000 Base-T, High-speed USB 3.0, Wi-Fi 802.11n and Wi-Fi Direct with optional Wi-Fi Kit (concurrent wired and wireless connections supported), NFC Tap-to-Pair | | |
| Controller Features | Unified Address Book, Configuration Cloning, Scan Preview, Xerox Extensible Interface Platform®, Xerox® App Gallery App, Xerox® Standard Accounting Tool, Network Accounting Enabled, Role Based Permissions, Convenience Authentication Enabled, Online Support | | |
| User Interface Languages | English, French, Italian, German, Spanish, Brazilian Portuguese, Russian, Dutch, Swedish, Danish, Finnish, Norwegian, Greek, Turkish, Polish, Czech, Hungarian, Romanian, Catalan, Ukrainian, Croatian | | |

| DEVICE SPECIFICATIONS | | | | |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|
| ELECTRICAL REQUIREMENTS | | | | |
| North America | Voltage: 110-127V -10% / +6% Frequency: 50/60 Hz +/-3%, 12A | | | |
| Europe and Other Geographies | Voltage: 220-240V +/- 10% Frequency: 50 Hz +/-3%, 8A | | | |
| POWER CONSUMPTION | | | | |
| Printing ⁴ | For 110V: 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh; 35 ppm = 1.7 kWh For 220V: 25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh; 35 ppm = 1.8 kWh | | | |
| Standby Mode ⁴ | 110V: 83 Watts or less; For 220V: 86 Watts or less | | | |
| Sleep Mode ⁴ | 110V: 1.2 watts or less, 220V: 1.4 watts or less | | | |
| OPERATING ENVIRONMENT | | | | |
| Required Temperature Range (Storage) | 32° to 95° F (0° to 35° C) | | | |
| Required Temperature Range (Operating) | 50 to 90° F (10 to 32° C) | | | |
| Required Relative Humidity | 10% to 85% | | | |
| Sound Power Levels | Printing: 6.75 B(A) or less • 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A) Standby: 4.10 B(A) or less • 25 ppm = 4.10 B(A); 30 ppm = 4.10 B(A); 35 ppm = 4.10 B(A) Full System (including finisher and HCF) Printing: 25 ppm = 7.22 B(A); 30 ppm = 7.37 B(A); 35 ppm = 7.46 B(A) Standby: 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A) | | | |
| Sound Pressure Levels | Printing: 50.0 dB(A) • 25 ppm = 49.4 dB(A); 30 ppm = 49.7 dB(A); 35 ppm = 50.0 dB(A) Standby: 16.4 dB(A) • 25 ppm = 16.4 dB(A); 30 ppm = 16.4 dB(A); 35 ppm = 16.0 dB(A) Full System (including finisher and HCF) Printing: 25 ppm = 53.4 dB(A); 30 ppm = 53.6 dB(A); 35 ppm = 54.0 dB(A) Standby: 25 ppm = 16.0 dB(A); 30 ppm = 16.0 dB(A); 35 ppm = 15.7 dB(A) | | | |
| Boot Time (from Off to UI Ready) | As fast as 98 seconds | | | |
| Warm-up Time (from Sleep to UI Ready) | As fast as 12 seconds | | | |
| DIMENSIONS AND WEIGHT (UNPACKAGED) | WIDTH | DEPTH | HEIGHT | WEIGHT |
| Base Unit | 23.23 in. / 590 mm | 26.41 in. / 670.8 mm | 30.23 in. / 767.9 mm | 113.1 lbs. / 51.3 kg |
| Base Unit with Single Tray with Stand Module | 24.24 in. / 615.7 mm | 26.41 in. / 670.8 mm | 44.04 in. / 1118.6 mm | 168.21 lbs. / 75.8 kg |
| Base Unit with High Capacity Tandem Tray Unit | 24.24 in. / 615.7 mm | 26.41 in. / 670.8 mm | 44.04 in. / 1118.6 mm | 193.35 lbs. / 87.2 kg |
| With Office Finisher LX (with Booklet Maker) | 47.0 in. / 1194.0 mm | 26.8 in. / 681.8 mm | 44.04 in. / 1118.6 mm | 249.12 lbs. / 113.0 kg |
| Certifications | | | | |
| | To view the latest list of certifications, go to www.xerox.com/OfficeCertifications . | | | |
| PRINT | VERSALINK B7025 | VERSALINK B7030 | VERSALINK B7035 | |
| First-print-out Time | As fast as 10.4 seconds | As fast as 9.1 seconds | As fast as 9.1 seconds | |
| Print Resolution | Up to 1200 x 1200 dpi | | | |

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

| | |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Page Description Languages | PCL® 5e, 6 PDF XPS TIFF JPEG HP-GL Adobe® PostScript® 3™ (Optional) |
| Maximum Print Area | 4 mm from lead edge of paper, 2 mm from Side and Trail edges of paper |
| Print Features | Application Defaults Banner Pages Enable / Disable Bi-directional Real-time Status Booklet Layout Draft Mode Finishing (requires finishing) Fit to new paper size Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) Job Monitoring (Client or Local User Interface) LAN Fax (requires Fax Kit) N-up Page Layout (up to 16 pages per sheet) Paper Selection by Attribute Personal Print Print Around Enable / Disable Print from USB Sample Set Saved Job Scaling Secure Print Skip Blank Pages Special Pages (exception page programming: covers, inserts, exceptions pages) Store and Recall Driver Settings Stored Jobs Deletion Two-sided Printing (as default) Watermark (predefined and custom) Earth Smart Driver Settings |
| Print from USB | Allows walk-up printing from Type A USB port Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, XPS, PDF/A |
| Operating Systems | Windows® 7, 8, 8.1, 10 Windows Server 2008 SP2, Server 2008 R2 SP1, Server 2012, Server 2012 R2, Server 2016 macOS® 10.11, 10.12, 10.13 Citrix® Redhat® Enterprise Linux® Fedora Core IBM® AIX® HP-UX® Oracle® Solaris SUSE® SAP® Note: For information about supported versions for the above operating systems, please visit our Drivers & Downloads page and specify your device at www.support.xerox.com . |
| Fonts | PostScript fonts: 136 PCL fonts: 83 |
| Xerox® Global Print Driver® | A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management. |
| Xerox® Pull Print Driver | Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others. |

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

| COPY | VERSALINK B7025 | VERSALINK B7030 | VERSALINK B7035 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Document Scanner | 110-sheet Duplex Automatic Document Feeder (DADF) | | |
| Document Scanner Size | Platen: Up to 13.1 x 17.2 in. / 332.0 x 437 mm DADF: Up to 11.7 x 17 in. / 297 x 431.8 mm | | |
| Simplex Copy Speed | Up to 25 cpm (copies per minute) 8.5 x 11 in. Up to 25 cpm A4 (210 x 297 mm) | Up to 30 cpm (copies per minute) 8.5 x 11 in. Up to 30 cpm A4 (210 x 297 mm) | Up to 35 cpm (copies per minute) 8.5 x 11 in. Up to 35 cpm A4 (210 x 297 mm) |
| Duplex Copy Speed | Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm) | Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm) | Up to 20 cpm (copies per minute) 8.5 x 11 in. Up to 20 cpm A4 (210 x 297 mm) |
| First-copy-out Time | As fast as 6.8 seconds | As fast as 5.4 seconds | As fast as 5.4 seconds |
| Sides (input:output) | 1:1, 1:2, 2:2 and 2:1 | | |
| Quantity | 1 to 999 | | |
| Resolution (max.) | Up to 600 x 600 dpi | | |
| Reduction / Enlargement | Variable zoom from 25% to 400% in 1% increments | | |
| Concurrency | Concurrent scanning and printing | | |
| Copy Features | Annotation (Page Numbers, Comments, Date Stamp, Bates Stamping)* Automatic Background Suppression Book Copying with Center Erase Booklet Copying* Collation Darkness Control Edge Erase Front Cover ID Card Copy Image Enhancement Lighten/Darken N-up Reduce / Enlarge 25% to 400% Image Shift Original Orientation Original Size Original Type Page Layout Sample Copy Saturation Sharpness *Requires HDD/Productivity Kit | | |
| SCAN | | | |
| Capability | Black-and-white and colour scanning | | |
| Concurrency | Scan while the system is printing copy or network print jobs, or while it is transferring scan to network or fax jobs | | |
| Simplex Input Speed | Black-and-white: Scan up to 55 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 55 ipm – 8.5 x 11 in. / 55 ipm A4 (210 x 297 mm) | | |
| Duplex Input Speed | Black-and-white: Scan up to 26 ipm – 8.5 x 11 in. / A4 (210 x 297 mm) Colour: Scan up to 26 ipm – 8.5 x 11 in. / 26 ipm A4 (210 x 297 mm) | | |
| Resolution | Optical – 600 x 600 dpi | | |
| Bit Depth | 24-bit colour / 8-bit grayscale | | |
| Maximum Scan Area | Platen: Up to 13.1 x 17.2 in. / 332 x 437 mm Document Feeder: 11.7 x 17 in. / 297 x 431.8 mm | | |
| Network Filing Protocols | FTP SMTP SMB sFTP | | |

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

| | |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| File Formats | JPG TIFF (single and multi-page) XPS (single and multi-page) PDF (single and multi-page) Searchable PDF via Optical Character Recognition (OCR) Password-protected PDF Linearised PDF (set via embedded web server) and PDF/A |
| Scan Driver Compatibility (Network Only) | WIA TWAIN |
| Supported Scan Destinations | Scan to Home Scan to USB Scan to Email Scan to Network (Browse FTP or Browse SMB) |
| NETWORK SCANNING – SOFTWARE SOLUTIONS | |
| Xerox® ConnectKey® Apps (Found at the Xerox App Gallery) | Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the ConnectKey-enabled multifunction printer. |
| PSTN ONE-LINE OR THREE-LINE FAX (OPTIONAL) | |
| FAX⁵ | |
| Fax Speed | 33.6 Kbps |
| Resolution | Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi |
| Compression | MH, MR, MMR, JBIG |
| Fax Features | Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts) |
| FAX OVER IP (OPTIONAL) | |
| Compliance | T.38 compliant IP / SIP |
| Resolution | Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi |
| Compression | MH, MR, MMR, JBIG |
| Fax Features | Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts) |
| MOBILE SOLUTIONS AND MOBILE DEVICE APPS | |
| Apple® AirPrint® | Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network. |
| Google Cloud Print™ | Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device. |
| Mopria® Certified | ConnectKey Technology-enabled print devices are Mopria® certified. Mopria® certification ensures you can print wirelessly from your Mopria® supported (Android) smart phone, tablet and other mobile devices instantly and easily. |
| Xerox®@printbyXerox App | @printbyXerox App is a free service that allows secure printing from any email-enabled device (computer, phone, tablet, iOS, Android™, Google® Chromebook™ and more) to a Xerox® printer or MFP using a single email address with no IT intervention. No training is needed. End-users simply send attachments to the email address, and release them at the MFP panel. |
| Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store) | The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to multifunction printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store. |
| Xerox® Mobile Link App (Free at Google Play™ Store and Apple® App Store) | The Xerox® Mobile Link App allows you to scan, email and fax from your phone or tablet by connecting with our multifunction printers and send data to and print data from cloud storage. It is easy to create Mobile Link One-Touch Workflows between a mobile device and a multifunction printer. Using a manual address or QR code identification for pairing, automatic device discovery makes it easy to find and pair a mobile device with a nearby Xerox® multifunction printer. |

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

| | |
|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Xerox® Workplace Suite and Xerox® Workplace Cloud | Xerox® Workplace Suite is a modular set of workflows designed to save customers time and money by providing effective control over their print fleet, while enabling worker productivity and mobility through a set of robust workflows. Xerox enables ultimate customer flexibility by offering these capabilities in both an on-premises server version (Workplace Suite) and with a cloud based-version (Workplace Cloud) of this solution. |
| SECURITY | |
| Security Features | Access Controls AES 256-bit Encryption Audit Log Certificate Path Validation Certificate Revocation List (CRL)/Status Protocol (OCSP) Detection of external program falsification (XCP Plug-in) Cisco® Identity Services Engine (ISE) Integration Domain Filtering FIPS 140-2 Firmware Verification Immediate Disk Overwrite* IP Address Filtering IPsec Network Authentication Port Filtering Pre-installed Self-Signed Certificates Role Based Permissions Secure Email Secure Fax Secure Print Security Certificate Management Smart Card Enablement (CAC/PIV/.NET) SNMPv3 Status Protocol (OCSP) TLS/SSL Trusted Platform Module (TPM) *Requires HDD/Productivity Kit |
| ACCOUNTING | |
| XEROX® STANDARD ACCOUNTING / NETWORK ACCOUNTING (STANDARD) | |
| Tracking | Copy, Print, Fax, Scan and Email usage |
| Accounting | Xerox® Standard Accounting Tool Up to 1,000 User Accounts without HDD Up to 9,999 User Accounts with HDD Up to 500 General accounts Network Accounting (Job Based Accounting) Up to 1,000 User IDs; Up to 1,000 Account IDs without HDD Up to 60,000 User IDs; Up to 60,000 Account IDs with HDD Up to 14,000 accounting records (transactions) |
| Features | Administrator can manage the feature via the Embedded Web Server. |
| ACCOUNTING OPTIONS – NETWORK ACCOUNTING ENABLEMENT (STANDARD) (ALLOWS CENTRAL SERVER TO MANAGE ALL ACCOUNTING) | |
| | <ul style="list-style-type: none"> Enhanced network accounting with up to the minute data on how the system is being used Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and server fax Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com Security enhancements include simultaneous support for HTTP/HTTPS protocols Device requests account authentication from third party server enabling larger databases of users and accounts Accept Authentication Login at control panel and pass to third party Networking Account Interface with third party accounting terminal for accounting user interface |

| PAPER HANDLING | | | |
|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------------------------------------------------|
| DOCUMENT FEEDER | | | |
| Capacity⁶ | Duplex Automatic Document Feeder (DADF): 110 sheets | | |
| Sizes One-sided: Two-sided: | Custom sizes: 4.92 x 3.35 in. to 11.69 x 17 in. / 125 x 85 mm to 297 x 431.8 mm 4.92 x 4.33 in. to 11.69 x 17 in. / 125 x 110 mm to 297 x 431.8 mm | | |
| Weights One-sided: Two-sided: | 11 lb. bond to 34 lb. bond / 38 to 128 gsm 13 lb. bond to 34 lb. bond / 50 to 128 gsm | | |
| BYPASS TRAY | | | |
| Capacity⁶ | 100 sheets | | |
| Sizes | Custom sizes: 3.5 x 3.87 in. to 11.69 x 17 in. / 88.9 x 98.4 mm to 297 x 431.8 mm | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 80 lb. cover / 60 to 216 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | |
| Types | Bond Plain Paper Cardstock Custom | Envelopes Hole Punched Labels Heavyweight Labels | Letterhead Lightweight Cardstock Pre-Printed Recycled |
| TRAY 1 | | | |
| Capacity⁶ | 520 sheets | | |
| Sizes | Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | |
| Types | Bond Plain Paper Cardstock Custom Hole Punched | Labels Heavyweight Labels Extra Heavyweight Labels Letterhead | Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled |
| CHOOSE 1 OF 4 ADDITIONAL PAPER HANDLING OPTIONS: | | | |
| OPTION 1 – SINGLE TRAY (TRAY 2) (DOES NOT INCLUDE STAND) | | | |
| Capacity⁶ | 520 sheets | | |
| Sizes | Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | |
| Types | Bond Plain Paper Cardstock Custom Hole Punched | Labels Heavyweight Labels Extra Heavyweight Labels Letterhead | Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled |
| OPTION 2 – SINGLE TRAY (TRAY 2) WITH STAND | | | |
| Capacity⁶ | 520 sheets | | |
| Sizes | Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | |
| Types | Bond Plain Paper Cardstock Custom Hole Punched | Labels Heavyweight Labels Extra Heavyweight Labels Letterhead | Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled |

| OPTION 3 – THREE TRAY STAND MODULE | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------|-----------------------|-------------|--------------------|-----------------------|-----------|--------------------------|-------------|--------|------------|----------|--------------|--|--|
| Capacity⁶ | Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets | | | | | | | | | | | | | | | |
| Sizes | Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm | | | | | | | | | | | | | | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | | | | | | | | | | | | | | |
| Types | <table border="0"> <tr> <td>Bond</td> <td>Labels</td> <td>Lightweight Cardstock</td> </tr> <tr> <td>Plain Paper</td> <td>Heavyweight Labels</td> <td>Heavyweight Cardstock</td> </tr> <tr> <td>Cardstock</td> <td>Extra Heavyweight Labels</td> <td>Pre-Printed</td> </tr> <tr> <td>Custom</td> <td>Letterhead</td> <td>Recycled</td> </tr> <tr> <td>Hole Punched</td> <td></td> <td></td> </tr> </table> | Bond | Labels | Lightweight Cardstock | Plain Paper | Heavyweight Labels | Heavyweight Cardstock | Cardstock | Extra Heavyweight Labels | Pre-Printed | Custom | Letterhead | Recycled | Hole Punched | | |
| Bond | Labels | Lightweight Cardstock | | | | | | | | | | | | | | |
| Plain Paper | Heavyweight Labels | Heavyweight Cardstock | | | | | | | | | | | | | | |
| Cardstock | Extra Heavyweight Labels | Pre-Printed | | | | | | | | | | | | | | |
| Custom | Letterhead | Recycled | | | | | | | | | | | | | | |
| Hole Punched | | | | | | | | | | | | | | | | |
| OPTION 4 – HIGH CAPACITY TANDEM TRAY STAND MODULE | | | | | | | | | | | | | | | | |
| Capacity⁶ | Tray 2: 520 sheets Tray 3: 870 sheets Tray 4: 1,130 sheets | | | | | | | | | | | | | | | |
| Sizes | Tray 2: Custom sizes: 5.5 x 7.17 in. to 11.69 x 17 in. / 139.7 x 182.0 mm to 297.0 x 431.8 mm Tray 3: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5 Tray 4: Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5 | | | | | | | | | | | | | | | |
| Weights One-sided: Two-sided: | 16 lb. bond to 95 lb. cover / 60 to 256 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | | | | | | | | | | | | | | |
| Types | <table border="0"> <tr> <td>Bond</td> <td>Labels</td> <td>Lightweight Cardstock</td> </tr> <tr> <td>Plain Paper</td> <td>Heavyweight Labels</td> <td>Heavyweight Cardstock</td> </tr> <tr> <td>Cardstock</td> <td>Extra Heavyweight Labels</td> <td>Pre-Printed</td> </tr> <tr> <td>Custom</td> <td>Letterhead</td> <td>Recycled</td> </tr> <tr> <td>Hole Punched</td> <td></td> <td></td> </tr> </table> | Bond | Labels | Lightweight Cardstock | Plain Paper | Heavyweight Labels | Heavyweight Cardstock | Cardstock | Extra Heavyweight Labels | Pre-Printed | Custom | Letterhead | Recycled | Hole Punched | | |
| Bond | Labels | Lightweight Cardstock | | | | | | | | | | | | | | |
| Plain Paper | Heavyweight Labels | Heavyweight Cardstock | | | | | | | | | | | | | | |
| Cardstock | Extra Heavyweight Labels | Pre-Printed | | | | | | | | | | | | | | |
| Custom | Letterhead | Recycled | | | | | | | | | | | | | | |
| Hole Punched | | | | | | | | | | | | | | | | |
| ENVELOPE TRAY – REPLACES TRAY 1 (OPTIONAL) | | | | | | | | | | | | | | | | |
| Capacity⁶ | Up to 60 envelopes | | | | | | | | | | | | | | | |
| Sizes | #10 commercial, Monarch, DL, C5 Custom sizes: 3.9 x 5.8 in. to 6.4 x 9.5 in. / 98 x 148 mm to 162 x 241 mm | | | | | | | | | | | | | | | |
| Weights | 20 lb. bond to 25 lb. bond / 75 to 90 gsm | | | | | | | | | | | | | | | |
| HIGH CAPACITY FEEDER (OPTIONAL) (REQUIRES 1 OF THE ABOVE PAPER HANDLING OPTIONS 2, 3 OR 4) | | | | | | | | | | | | | | | | |
| Capacity⁶ | 2,000 sheets | | | | | | | | | | | | | | | |
| Sizes | Standard Sizes: 8.5 x 11 in. and 7.25 x 10.5 in. / A4 or B5 | | | | | | | | | | | | | | | |
| Weights | 16 lb. bond to 80 lb. cover / 60 to 216 gsm 16 lb. bond to 60 lb. cover / 60 to 169 gsm | | | | | | | | | | | | | | | |
| TOTAL CAPACITY | | | | | | | | | | | | | | | | |
| Base Unit Capacity⁶ | 620 sheets | | | | | | | | | | | | | | | |
| Single Tray Module Capacity⁶ | 1,140 sheets | | | | | | | | | | | | | | | |
| Single Tray Module with Stand Capacity⁶ | 1,140 sheets | | | | | | | | | | | | | | | |
| Three Tray Module Capacity⁶ | 2,180 sheets | | | | | | | | | | | | | | | |
| High-Capacity Tandem Tray Capacity⁶ | 3,140 sheets | | | | | | | | | | | | | | | |

| FINISHING | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CENTRE OUTPUT TRAYS | |
| Centre Output Tray (Standard) | 500 sheets Offset |
| Dual Catch Trays⁶ (Optional) | 250 sheets each; Lower tray offsets (Not usable with other finishing options) |
| CENTRE OUTPUT TRAY (NOT COMPATIBLE WITH OTHER FINISHING OPTIONS) | |
| Dual Catch Trays⁶ | 250 sheets each; Lower tray offsets |
| INTEGRATED OFFICE FINISHER (OPTIONAL) | |
| Stacking Tray | 500 sheets of 20 lb. bond / 80 gsm – 8.5 x 11 in. / A4 or 250 sheets of 20 lb. bond / 80 gsm – 11 x 17 in. / A3 |
| Sizes | 3.5 x 3.9 in. to 11.7 x 17 in. / 89 x 98 mm to 297 x 432 mm |
| Weights | 16 lb. bond to 80 lb. cover / 60 to 220 gsm |
| Stapling | Single Auto stapling: 50 sheets maximum: Letter / A4 / B5-size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: Legal / Tabloid / A3 / B4-size sheets (less than 90 gsm or (2) 220 gsm covers) |
| OFFICE FINISHER LX (OPTIONAL) (REQUIRES 1 OF THE ABOVE PAPER HANDLING OPTIONS 2, 3 OR 4) | |
| Capacity⁶ | Stacking Tray: 2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (8.5 x 11 in. / A4) (dual stapling only with optional booklet maker) |
| Sizes | 8.3 x 7.2 in. to 11.7 x 17 in. / 210 x 182 mm to 297 x 432 mm |
| Weights | 16 lb. bond to 80 lb. cover / 60 to 220 gsm |
| Multiposition Stapling | 50 sheets of 24 lb. bond / 90 gsm |
| Hole Punch (Optional) North America: Europe: | 2-3 Hole Punch 2-4 Hole Punch |
| BOOKLET MAKER FOR OFFICE FINISHER LX (SCORE/CREASE, SADDLE-STITCH STAPLE) (OPTIONAL) (REQUIRES 1 OF THE ABOVE PAPER HANDLING OPTIONS 2, 3 OR 4) | |
| Capacity⁶ | 40 booklets (2-15 sheets per booklet – 20 lb. / 80 gsm or less) |
| Sizes | Letter – 8.5 x 11 in. / A4 SEF Legal – 8.5 x 14 in. / B4 SEF Ledger – 11 x 17 in. / A3 SEF |
| Saddle-stitch Stapling | 2-15 sheets / 8-60 page booklet 16 lb. bond to 24 lb. bond / 60 to 90 gsm |
| Score / Crease | 1-15 sheets / unstapled |
| CONVENIENCE STAPLER (OPTIONAL – INCLUDES WORK SURFACE) | |
| Capacity⁶ | 50-sheet stapling 5,000 staples Requires a separate outlet |
| DEVICE MANAGEMENT | |
| Network Protocols | TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD LDAP Bonjour® / AirPrint™ FTP Most protocols not in use can be disabled |
| Administrative Protocols | DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS |
| XEROX® CENTREWARE® WEB | |
| | <ul style="list-style-type: none"> • A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system • Works with any SNMP-managed printer from any manufacturer • Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management |

| XEROX® EMBEDDED WEB SERVER – INTEGRATED DEVICE WEB PAGE | | |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Device Status | <ul style="list-style-type: none"> • Tray status/contents • Consumables status • Billing/Usage • Quick Links • Online Support | |
| Print Queue Viewing | Job print queue management—View and delete | |
| Job Submission | Print-ready files (PS (with optional PostScript option), PCL, PDF, XPS, JPEG) | |
| Device Administration | Allows simple, remote installation setting of configuration options and management of the device | |
| Browsers | Microsoft® Internet Explorer® Microsoft Edge™ Mozilla™ Firefox® Apple® Safari® Google Chrome™ | |
| REMOTE SERVICES | | |
| Xerox® Meter Assistant® Service | Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time. | |
| Xerox® Supplies Assistant® Service | Automatically orders supplies for Xerox® output devices based on actual usage, eliminating the need to manually manage supplies inventory. | |
| SUPPLIES AND ACCESSORIES | QUANTITY | PART NUMBER |
| SUPPLIES | | |
| Standard Capacity Print Cartridges | 15,500 standard pages ⁷ | 106R03395 |
| High Capacity Print Cartridges | 31,000 standard pages ⁷ | 106R03396 |
| Worldwide Metered Print Cartridge | 30,000 standard pages ⁸ | 106R03392 |
| Black Drum Cartridge | 80,000 pages ⁹ | 113R00779 |
| LX Booklet Maker Cartridge (8 cartridges per carton) | 16,000 staples | 008R12897 |
| Staple Refills for Finishers (3 cartridges per carton) | 15,000 staples | 008R12941 |
| Staple Cartridge for Finishers (1 cartridge per carton) | 5,000 staples | 008R12964 |

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

| ACCESSORIES / OPTIONS | |
|--------------------------------------------------------------------------|-----------|
| Single Tray Module (does not include stand – for Base Model only) | 097S04910 |
| Single Tray with Stand Module | 097S04907 |
| Three Tray Module | 097S04908 |
| High-Capacity Tandem Tray Module | 097S04909 |
| Envelope Tray (This replaces Tray 1) | 497K17720 |
| Centre Output Tray (Dual Catch Tray) | 497K17800 |
| HDD (320 GB Hard Drive) | 497K17740 |
| 1 Line Fax Kit (PSTN Fax) | 497K17750 |
| 3 Line Fax Kit (PSTN Fax) | 497K17760 |
| 1 Line Fax Kit (PSTN Fax) (India, Brazil and Argentina) | 497K17790 |
| Wireless Network Adapter Kit | 497K16750 |
| PostScript Kit | 497K17810 |
| Fax Over IP Kit | 497K17820 |

¹ Declared print speed in accordance with ISO/IEC 24734.

² Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

³ Recommended average throughput is not a minimum, but is intended to cover a range of volumes for different environments.

⁴ Power states defined per ENERGY STAR® Program requirements for Imaging Equipment.

⁵ Requires analog phone line.

⁶ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

⁷ Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and print mode.

⁸ Assumptions: Toner cartridge yield is based on 5% area coverage on 8.5 x 11 in. / A4 LEF. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, run mode, application types, monthly print volumes and image quality set-points.

⁹ Approximate pages. Declared yield will vary depending on job run length, media size/orientation and machine speed. For more information visit: <https://www.office.xerox.com/latest/SUPGL-01.pdf>.

For more information, visit us at www.xerox.com/office

Configurations vary by geography.