


Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

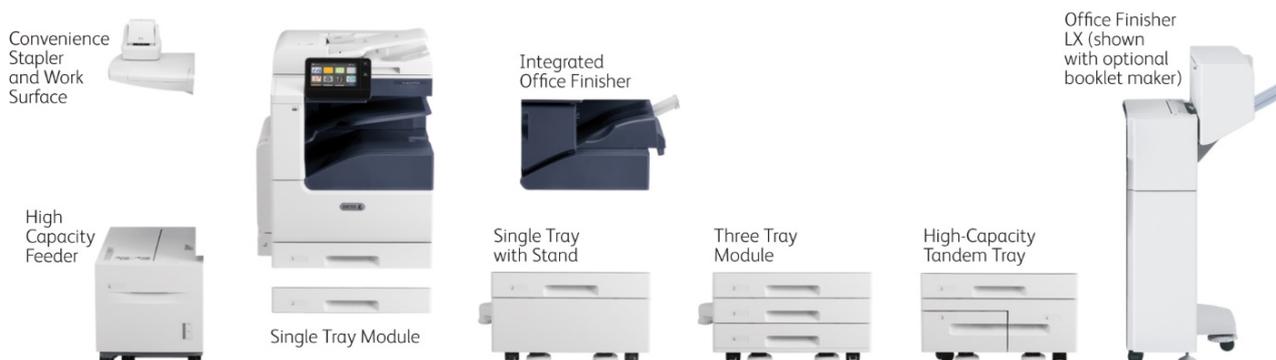

VersaLink B7000 Series Multifunction Printers are built on Xerox® ConnectKey® Technology. For more information, go to www.ConnectKey.com.

SYSTEM SPECIFICATIONS	VERSALINK B7025	VERSALINK B7030	VERSALINK B7035
One-Sided Speed¹ A4 / 210 x 297 mm 216 x 356 mm A3 / 297 x 420 mm	Up to 25 ppm (pages per minute) long edge feed (LEF) Up to 16 ppm Up to 14 ppm	Up to 30 ppm LEF Up to 20 ppm Up to 17 ppm	Up to 35 ppm LEF Up to 22 ppm Up to 19 ppm
Two-Sided Speed¹ A4 / 210 x 297 mm 216 x 356 mm A3 / 297 x 420 mm	Up to 19 ppm LEF Up to 10 ppm Up to 9 ppm	Up to 23 ppm LEF Up to 12 ppm Up to 11 ppm	Up to 26 ppm LEF Up to 14 ppm Up to 13 ppm
Monthly Duty Cycle²	Up to 107,000 pages / month ¹	Up to 129,000 pages / month ¹	Up to 153,000 pages / month ¹
Recommended Average Monthly Print Volume³	Up to 13,000 pages	Up to 15,000 pages	Up to 17,000 pages
Hard Drive	320 GB HDD (Optional on Desktop model)		
Processor	1.05 GHz Dual-Core		
Memory	2 GB		
Connectivity	Ethernet 10/100/1000 Base-T, High-speed USB 3.0, Wi-Fi 802.11n and Wi-Fi Direct with optional Wi-Fi Kit (concurrent wired and wireless connections supported), NFC Tap-to-Pair		
Controller Features	Unified Address Book, Configuration Cloning, Scan Preview, Xerox Extensible Interface Platform®, Xerox® App Gallery App, Xerox® Standard Accounting Tool, Network Accounting Enabled, Role Based Permissions, Convenience Authentication Enabled, Online Support		
User Interface Languages	English, French, Italian, German, Spanish, Brazilian Portuguese, Russian, Dutch, Swedish, Danish, Finnish, Norwegian, Greek, Turkish, Polish, Czech, Hungarian, Romanian, Catalan, Ukrainian, Croatian		

DEVICE SPECIFICATIONS				
ELECTRICAL REQUIREMENTS				
Europe and Other Geographies	Voltage: 220-240V +/- 10% Frequency: 50 Hz +/- 3%, 8A			
POWER CONSUMPTION				
Printing⁴	25 ppm = 1.1 kWh; 30 ppm = 1.5 kWh; 35 ppm = 1.8 kWh			
Standby Mode⁴	86 Watts or less			
Sleep Mode⁴	1.4 watts or less			
OPERATING ENVIRONMENT				
Required Temperature Range (Storage)	0° to 35° C			
Required Temperature Range (Operating)	10 to 32° C			
Required Relative Humidity	10% to 85%			
Sound Power Levels	Printing: 6.75 B(A) or less • 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A) Standby: 4.10 B(A) or less • 25 ppm = 4.10 B(A); 30 ppm = 4.10 B(A); 35 ppm = 4.10 B(A) Full System (including finisher and HCF) Printing: 25 ppm = 7.22 B(A); 30 ppm = 7.37 B(A); 35 ppm = 7.46 B(A) Standby: 25 ppm = 6.54 B(A); 30 ppm = 6.70 B(A); 35 ppm = 6.75 B(A)			
Sound Pressure Levels	Printing: 50.0 dB(A) • 25 ppm = 49.4 dB(A); 30 ppm = 49.7 dB(A); 35 ppm = 50.0 dB(A) Standby: 16.4 dB(A) • 25 ppm = 16.4 dB(A); 30 ppm = 16.4 dB(A); 35 ppm = 16.0 dB(A) Full System (including finisher and HCF) Printing: 25 ppm = 53.4 dB(A); 30 ppm = 53.6 dB(A); 35 ppm = 54.0 dB(A) Standby: 25 ppm = 16.0 dB(A); 30 ppm = 16.0 dB(A); 35 ppm = 15.7 dB(A)			
Boot Time (from Off to UI Ready)	As fast as 98 seconds			
Warm-up Time (from Sleep to UI Ready)	As fast as 12 seconds			
DIMENSIONS AND WEIGHT (UNPACKAGED)	WIDTH	DEPTH	HEIGHT	WEIGHT
Base Unit	590 mm	670.8 mm	767.9 mm	51.3 kg
Base Unit with Single Tray with Stand Module	615.7 mm	670.8 mm	1118.6 mm	75.8 kg
Base Unit with High Capacity Tandem Tray Unit	615.7 mm	670.8 mm	1118.6 mm	87.2 kg
With Office Finisher LX (with Booklet Maker)	1194.0 mm	681.8 mm	1118.6 mm	113.0 kg
CERTIFICATIONS				
To view the latest list of certifications, go to www.xerox.com/OfficeCertifications .				
PRINT	VERSALINK B7025	VERSALINK B7030	VERSALINK B7035	
First-print-out Time	As fast as 10.4 seconds	As fast as 9.1 seconds	As fast as 9.1 seconds	
Print Resolution	Up to 1200 x 1200 dpi			
Page Description Languages	PCL® 5e, 6 PDF XPS TIFF JPEG HP-GL Adobe® PostScript® 3™ (Optional)			
Maximum Print Area	4 mm from lead edge of paper, 2 mm from Side and Trail edges of paper			

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Print Features	Application Defaults Banner Pages Enable / Disable Bi-directional Real-time Status Booklet Layout Draft Mode Finishing (requires finishing) Fit to new paper size Job Identification (Print ID or Banner, Print ID in margins on first page only or all pages) Job Monitoring (Client or Local User Interface) LAN Fax (requires Fax Kit) N-up Page Layout (up to 16 pages per sheet) Paper Selection by Attribute Personal Print Print Around Enable / Disable Print from USB Sample Set Saved Job Scaling Secure Print Skip Blank Pages Special Pages (exception page programming: covers, inserts, exceptions pages) Store and Recall Driver Settings Stored Jobs Deletion Two-sided Printing (as default) Watermark (predefined and custom) Earth Smart Driver Settings		
Print from USB	Allows walk-up printing from Type A USB port Supports direct printing from computer via Type B USB port Supported file formats: PDF, JPEG, TIFF, XPS, PDF/A		
Operating Systems	Windows® 7, 8, 8.1, 10 Windows Server 2008 SP2, Server 2008 R2 SP1, Server 2012, Server 2012 R2, Server 2016 macOS® 10.11, 10.12, 10.13 Citrix® Redhat® Enterprise Linux® Fedora Core IBM® AIX® HP-UX® Oracle® Solaris SUSE® SAP® Note: For information about supported versions for the above operating systems, please visit our Drivers & Downloads page and specify your device at www.support.xerox.com .		
Fonts	PostScript fonts: 136 PCL fonts: 83		
Xerox® Global Print Driver®	A truly universal print driver that lets IT administrators install, upgrade and manage Xerox® and non-Xerox® devices from a single driver. It provides a consistent, easy-to-use interface for end-users, reducing the number of support calls, and simplifying print services management.		
Xerox® Pull Print Driver	Makes it easy for IT managers to qualify, deploy and manage all print devices using a single driver in a Pull Print environment. Uses a single queue and single driver. The Xerox® Pull Print Driver extends convenience across a broad range of printing assets. IT administrators no longer need to manage and configure multiple drivers. Used in conjunction with Equitrac Office®, Ysoft® SafeQ®, Pharos® and others.		
COPY	VERSALINK B7025	VERSALINK B7030	VERSALINK B7035
Document Scanner	110-sheet Duplex Automatic Document Feeder (DADF)		
Document Scanner Size	Platen: Up to 332.0 x 437 mm DADF: Up to 297 x 431.8 mm		
Simplex Copy Speed	Up to 25 cpm A4 / 210 x 297 mm)	Up to 30 cpm A4 / 210 x 297 mm)	Up to 35 cpm A4 / 210 x 297 mm)
Duplex Copy Speed	Up to 20 cpm A4 / 210 x 297 mm)	Up to 20 cpm A4 / 210 x 297 mm)	Up to 20 cpm A4 / 210 x 297 mm)
First-copy-out Time	As fast as 6.8 seconds	As fast as 5.4 seconds	As fast as 5.4 seconds
Sides (input:output)	1:1, 1:2, 2:2 and 2:1		

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

Quantity	1 to 999
Resolution (max.)	Up to 600 x 600 dpi
Reduction / Enlargement	Variable zoom from 25 % to 400 % in 1 % increments
Concurrency	Concurrent scanning and printing
Copy Features	Annotation (Page Numbers, Comments, Date Stamp, Bates Stamping)* Automatic Background Suppression Book Copying with Centre Erase Booklet Copying* Collation Darkness Control Edge Erase Front Cover ID Card Copy Image Enhancement Lighten/Darken N-up Reduce / Enlarge 25 % to 400 % Image Shift Original Orientation Original Size Original Type Page Layout Sample Copy Saturation Sharpness *Requires HDD/Productivity Kit
SCAN	
Capability	Black-and-white and colour scanning
Concurrency	Scan while the system is printing copy or network print jobs, or while it is transferring scan to network or fax jobs
Simplex Input Speed	Black-and-white: Scan up to 55 ipm – A4 / 210 x 297 mm Colour: Scan up to 55 ipm A4 / 210 x 297 mm
Duplex Input Speed	Black-and-white: Scan up to 26 ipm – A4 / 210 x 297 mm Colour: Scan up to 26 ipm A4 / 210 x 297 mm
Resolution	Optical – 600 x 600 dpi
Bit Depth	24-bit colour / 8-bit grayscale
Maximum Scan Area	Platen: Up to 332 x 437 mm Document Feeder: 297 x 431.8 mm
Network Filing Protocols	FTP SMTP SMB sFTP
File Formats	JPG TIFF (single and multi-page) XPS (single and multi-page) PDF (single and multi-page) Searchable PDF via Optical Character Recognition (OCR) Password-protected PDF Linearised PDF (set via embedded web server) and PDF/A
Scan Driver Compatibility (Network Only)	WIA TWAIN
Supported Scan Destinations	Scan to Home Scan to USB Scan to Email Scan to Network (Browse FTP or Browse SMB)

NETWORK SCANNING – SOFTWARE SOLUTIONS	
Xerox® ConnectKey® Apps (Found at the Xerox App Gallery)	Increase user productivity by simplifying and shortening everyday tasks. Unlike traditional software, ConnectKey Apps do not require a dedicated server, PC or IT resource. Instead, simply download these lightweight, serverless ConnectKey Apps to the ConnectKey-enabled multifunction printer.
PSTN ONE-LINE OR THREE-LINE FAX (OPTIONAL)	
FAX⁵	
Fax Speed	33.6 Kbps
Resolution	Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)
FAX OVER IP (OPTIONAL)	
Compliance	T.38 compliant IP / SIP
Resolution	Standard 200x100 dpi, Fine 200x200 dpi, Super Fine 300x300, 400x400, 600x600 dpi
Compression	MH, MR, MMR, JBIG
Fax Features	Walk-up Fax, includes LAN Fax, Direct Fax, Fax Forward to Email Fax dialing via Unified Address Book (up to 2,000 contacts)
MOBILE SOLUTIONS AND MOBILE DEVICE APPS	
Apple® AirPrint®	Print email, photos and important office documents directly from an Apple iPhone® or iPad® with no drivers to install and no cables to connect. With AirPrint, an iPhone or iPad automatically locates and connects to the AirPrint-enabled device over the office Wi-Fi network.
Google Cloud Print™	Google Cloud Print connects print devices to the web, enabling users to print the applications they use every day from smartphones, tablets, Chromebook™ notebook computers and any other web-connected device.
Mopria® Certified	ConnectKey Technology-enabled print devices are Mopria® certified. Mopria® certification ensures you can print wirelessly from your Mopria® supported (Android) smart phone, tablet and other mobile devices instantly and easily.
Xerox® @printbyXerox App	@printbyXerox App is a free service that allows secure printing from any email-enabled device (computer, phone, tablet, iOS, Android™, Google® Chromebook™ and more) to a Xerox® printer or MFP using a single email address with no IT intervention. No training is needed. End-users simply send attachments to the email address, and release them at the MFP panel.
Xerox® Print Service Plug-in for Android™ (Free at Google Play™ Store)	The Xerox® Print Service Plug-in for Android KitKat (4.4 or greater) devices streamlines mobile printing without third-party apps or additional print drivers. You can easily print photos, Web pages and documents when your mobile device is connected to multifunction printers using a wireless network. A robust print option set includes two-sided printing, stapling and secure code release. A free download is available from the Google Play™ store.
Xerox® Mobile Link App (Free at Google Play™ Store and Apple® App Store)	The Xerox® Mobile Link App allows you to scan, email and fax from your phone or tablet by connecting with our multifunction printers and send data to and print data from cloud storage. It is easy to create Mobile Link One-Touch Workflows between a mobile device and a multifunction printer. Using a manual address or QR code identification for pairing, automatic device discovery makes it easy to find and pair a mobile device with a nearby Xerox® multifunction printer.

SECURITY	
Security Features	Access Controls AES 256-bit Encryption Audit Log Certificate Path Validation Certificate Revocation List (CRL)/Status Protocol (OCSP) Detection of external programme falsification (XCP Plug-in) Cisco® Identity Services Engine (ISE) Integration Domain Filtering FIPS 140-2 Firmware Verification Immediate Disk Overwrite* IP Address Filtering IPsec Network Authentication Port Filtering Pre-installed Self-Signed Certificates Role Based Permissions Secure Email Secure Fax Secure Print Security Certificate Management Smart Card Enablement (CAC/PIV/.NET) SNMPv3 Status Protocol (OCSP) TLS/SSL Trusted Platform Module (TPM)
	*Requires HDD/Productivity Kit
ACCOUNTING	
XEROX® STANDARD ACCOUNTING / NETWORK ACCOUNTING (STANDARD)	
Tracking	Copy, Print, Fax, Scan and Email usage
Accounting	Xerox® Standard Accounting Tool Up to 1,000 User Accounts without HDD Up to 9,999 User Accounts with HDD Up to 500 General accounts Network Accounting (Job Based Accounting) Up to 1,000 User IDs; Up to 1,000 Account IDs without HDD Up to 60,000 User IDs; Up to 60,000 Account IDs with HDD Up to 14,000 accounting records (transactions)
Features	Administrator can manage the feature via the Embedded Web Server.
ACCOUNTING OPTIONS – NETWORK ACCOUNTING (ALLOWS CENTRAL SERVER TO MANAGE ALL ACCOUNTING)	
	<ul style="list-style-type: none"> Enhanced network accounting with up to the minute data on how the system is being used Comprehensive management and enterprise scale tracking and reporting of device usage of copy, print, scan and fax Numerous solutions are available through Xerox Alliance Partners. For details visit www.xerox.com Security enhancements include simultaneous support for HTTP/HTTPS protocols Device requests account authentication from third party server enabling larger databases of users and accounts Accept Authentication Login at control panel and pass to third party Networking Account
PAPER HANDLING	
DOCUMENT FEEDER	
Capacity⁶	Duplex Automatic Document Feeder (DADF): 110 sheets
Sizes One-sided: Two-sided:	Custom sizes: 125 x 85 mm to 297 x 431.8 mm 125 x 110 mm to 297 x 431.8 mm
Weights One-sided: Two-sided:	38 to 128 gsm 50 to 128 gsm

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

BYPASS TRAY			
Capacity⁶	100 sheets		
Sizes	Custom sizes: 88.9 x 98.4 mm to 297 x 431.8 mm		
Weights One-sided: Two-sided:	60 to 216 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom	Envelopes Hole Punched Labels Heavyweight Labels	Letterhead Lightweight Cardstock Pre-Printed Recycled
TRAY 1			
Capacity⁶	520 sheets		
Sizes	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm		
Weights One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom Hole Punched	Labels Heavyweight Labels Extra Heavyweight Labels Letterhead	Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
SINGLE TRAY MODULE (OPTIONAL – BASE MODEL ONLY)			
Capacity⁶	520 sheets		
Sizes	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm		
Weights One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom Hole Punched	Labels Heavyweight Labels Extra Heavyweight Labels Letterhead	Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
SINGLE TRAY MODULE WITH STAND (OPTIONAL)			
Capacity⁶	520 sheets		
Sizes	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm		
Weights One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom Hole Punched	Labels Heavyweight Labels Extra Heavyweight Labels Letterhead	Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
THREE TRAY MODULE (OPTIONAL)			
Capacity⁶	Tray 2: 520 sheets Tray 3: 520 sheets Tray 4: 520 sheets		
Sizes	Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm		
Weights One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom Hole Punched	Labels Heavyweight Labels Extra Heavyweight Labels Letterhead	Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
HIGH CAPACITY TANDEM TRAY MODULE (OPTIONAL)			
Capacity⁶	Tray 2: 520 sheets		

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

	Tray 3: 870 sheets Tray 4: 1,130 sheets		
Sizes	Tray 2: Custom sizes: 139.7 x 182.0 mm to 297.0 x 431.8 mm Tray 3: Standard Sizes: A4 or B5 Tray 4: Standard Sizes: A4 or B5		
Weights One-sided: Two-sided:	60 to 256 gsm 60 to 169 gsm		
Types	Bond Plain Paper Cardstock Custom Hole Punched	Labels Heavyweight Labels Extra Heavyweight Labels Letterhead	Lightweight Cardstock Heavyweight Cardstock Pre-Printed Recycled
ENVELOPE TRAY – REPLACES TRAY 1 (OPTIONAL)			
Capacity⁶	Up to 60 envelopes		
Sizes	Monarch, DL, C5 Custom sizes: 98 x 148 mm to 162 x 241 mm		
Weights	75 to 90 gsm		
HIGH CAPACITY FEEDER (OPTIONAL)			
Capacity⁶	2,000 sheets		
Sizes	Standard Sizes: A4 or B5		
Weights	60 to 216 gsm 60 to 169 gsm		
TOTAL CAPACITY			
Base Unit Capacity⁶	620 sheets		
Single Tray Module Capacity⁶	1,140 sheets		
Single Tray Module with Stand Capacity⁶	1,140 sheets		
Three Tray Module Capacity⁶	2,180 sheets		
High-Capacity Tandem Tray Capacity⁶	3,140 sheets		
FINISHING			
Output Trays (Optional on Desktop Model)			
Dual Catch Trays⁶	250 sheets each; Lower tray offsets		
Integrated Office Finisher (Optional)			
Stacking Tray	500 sheets of 80 gsm – A4 or 250 sheets of 80 gsm – A3		
Sizes	89 x 98 mm to 297 x 432 mm		
Weights	60 to 220 gsm		
Stapling	Single Auto stapling: 50 sheets maximum: A4 / B5-size sheets (less than 90 gsm or (2) 220 gsm covers) 30 sheets maximum: A3 / B4-size sheets (less than 90 gsm or (2) 220 gsm covers)		
OFFICE FINISHER LX (OPTIONAL)			
Capacity⁶	Stacking Tray: 2,000 sheets unstapled or 1,000 sheets single stapled or 750 sheets dual stapled (A4) (dual stapling only with optional booklet maker)		
Sizes	210 x 182 mm to 297 x 432 mm		
Weights	60 to 220 gsm		
Multiposition Stapling	50 sheets of 90 gsm		
Hole Punch (Optional)	2-4 Hole Punch		

BOOKLET MAKER FOR OFFICE FINISHER LX (SCORE/CREASE, SADDLE-STITCH STAPLE) (OPTIONAL)	
Capacity⁶	40 booklets (2-15 sheets per booklet – 80 gsm or less)
Sizes	A4 SEF Legal – B4 SEF Ledger – A3 SEF
Saddle-stitch Stapling	2-15 sheets / 8-60 page booklet 60 to 90 gsm
Score / Crease	1-15 sheets / unstapled
CONVENIENCE STAPLER (OPTIONAL – INCLUDES WORK SURFACE)	
Capacity⁶	50-sheet stapling 5,000 staples Requires a separate outlet
DEVICE MANAGEMENT	
Network Protocols	TCP/IP: HTTP/HTTPS, Internet Printing Protocol, LPR/LPD, Raw Socket Printing/Port 9100, IPv4/IPv6, WSD LDAP Bonjour® / AirPrint™ FTP Most protocols not in use can be disabled
Administrative Protocols	DHCP, SNMP, WINS, HTTP, HTTPS, TLS, SNTP, MDNS
XEROX® CENTREWARE® WEB	
	<ul style="list-style-type: none"> • A Web-based server application for network administrators that permits web browser-based device management from any workstation, whether running Windows or UNIX or any other operating system • Works with any SNMP-managed printer from any manufacturer • Provides help with device discovery and installations, health checks and troubleshooting, and device upgrades, as well as basic accounting and asset management
XEROX® EMBEDDED WEB SERVER – INTEGRATED DEVICE WEB PAGE	
Device Status	<ul style="list-style-type: none"> • Tray status/contents • Consumables status • Billing/Usage • Quick Links • Online Support
Print Queue Viewing	Job print queue management—View and delete
Job Submission	Print-ready files (PS (with optional PostScript option), PCL, PDF, XPS, JPEG)
Device Administration	Allows simple, remote installation setting of configuration options and management of the device
Browsers	Microsoft® Internet Explorer® Microsoft Edge™ Mozilla™ Firefox® Apple® Safari® Google Chrome™
REMOTE SERVICES	
Automated Meter Reading (AMR)	Automates the process of collecting and submitting meter reads for tracking and billing of Xerox® device usage. Eliminates the need for time-consuming end-user involvement and ensures that meter reads are submitted to Xerox on time.
Automated Supplies Replenishment (ASR)	Automatically orders supplies for Xerox output devices based on actual usage, eliminating the need to manually manage supplies inventory.

Xerox® VersaLink® B7025/B7030/B7035 Multifunction Printer

SUPPLIES AND ACCESSORIES	QUANTITY	PART NUMBER
SUPPLIES		
Standard Capacity Print Cartridges	15,500 standard pages ⁷	106R03393
High Capacity Print Cartridges	31,000 standard pages ⁷	106R03394
Worldwide Metered Print Cartridge	30,000 standard pages ⁸	106R03392
Black Drum Cartridge	80,000 pages ⁹	113R00779
LX Booklet Maker Cartridge (8 cartridges per carton)	16,000 staples	008R12897
Staple Refills for Finishers (3 cartridges per carton)	15,000 staples	008R12941
Staple Cartridge for Finishers (1 cartridge per carton)	5,000 staples	008R12964
ACCESSORIES / OPTIONS		
Single Tray Module (does not include stand – for Base Model only)		097S04910
Single Tray with Stand Module		097S04907
Three Tray Module		097S04908
High-Capacity Tandem Tray Module		097S04909
Envelope Tray (This replaces Tray 1)		497K17720
Centre Output Tray (Dual Catch Tray)		497K17800
HDD (320 GB Hard Drive)		497K17740
1 Line Fax Kit (PSTN Fax)		497K17750
3 Line Fax Kit (PSTN Fax)		497K17760
Wireless Network Adapter Kit		497K16750
PostScript Kit		497K17810
Fax Over IP Kit		497K17820

¹ Declared print speed in accordance with ISO/IEC 24734.

² Maximum volume capacity expected in any one month. Not expected to be sustained on a regular basis.

³ Recommended average throughput is not a minimum, but is intended to cover a range of volumes for different environments.

⁴ Power states defined per ENERGY STAR® Program requirements for Imaging Equipment.

⁵ Requires analog phone line.

⁶ Paper capacities are based on 20 lb. / 75 gsm stock; capacities will vary with different weight stocks.

⁷ Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and print mode.

⁸ Assumptions: Toner cartridge yield is based on 5% area coverage on 8.5 x 11 in. / A4 LEF. Toner yield can vary due to many factors, including but not limited to, image area coverage, image content, media size, run mode, application types, monthly print volumes and image quality set-points.

⁹ Approximate pages. Declared yield will vary depending on job run length, media size/orientation and machine speed. For more information visit: <https://www.office.xerox.com/latest/SUPGL-01.pdf>.

For more information, visit us at www.xerox.com/Office

Configurations vary by geography.